

HIGHWAY

Solar Module

HT72-156P HT72-156P(V) 315W-335W

* V means 1500V module



Advanced surface treatment, less surface reflection and 5BB cell design can reduce the series resistance and improve the module efficiency



17.3%
Module Efficiency



Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BoS costs



TUV certification



Higher module's output power



Certified to withstand dynamic mechanical load 1000 Pascal



HT-SAAE guarantees highest production standards: IEC 61215, IEC 61730, IEC 62716 (Ammonia corrosion) & IEC 61701 (Salt Mist Corrosion)



PID resistant



Microcrack resistant
Triple EL tested of high quality control.



All the modules are sorted and packaged by amperage, reducing mismatch losses and maximizing system output.



10Ys Products Warranty



25Ys Warranty on power output



Strict quality control, meeting the highest international standards: ISO 9001, ISO14001 and OHSAS18001



Positive tolerance 0/+5w guaranteed



Entire module certified to withstand extreme wind (2400 Pa) and snow loads (5400 Pa)



Electrical Characteristics

Module	HT72-156P / HT72-156P(V)				
	315W	320W	325W	330W	335W
Maximum Power at STC(Pmax)	315W	320W	325W	330W	335W
Open-Circuit Voltage(Voc)	45.4V	45.6V	45.8V	46V	46.2V
Short-Circuit Current(Isc)	9.05A	9.12A	9.19A	9.26A	9.33A
Optimum Operating Voltage (Vmp)	37.8V	38.2V	38.6V	38.9V	39.3V
Optimum Operating Current(Imp)	8.34A	8.39A	8.44A	8.49A	8.54A
Module Efficiency	16.2%	16.5%	16.7%	17.0%	17.3%
Power Tolerance	0 ~ +5W				
Maximum System Voltage	1000V/1500V DC(IEC)				
Maximum Series Fuse Rating	15A				
Operating Temperature	-40 °C to +85 °C				
STC: Irradiance 1000W/m ² , module temperature 25, AM=1.5					
Optional black frame or white frame module according to customer requirements					

NOCT

Module	HT72-156P / HT72-156P(V)				
	231W	231W	239W	242W	246W
Maximum Power	231W	231W	239W	242W	246W
Open Circuit Voltage (Voc)	42.1V	42.3V	42.5V	42.7V	42.9V
Short Circuit Current (Isc)	7.31A	7.37A	7.43A	7.48A	7.54A
Maximum Power Voltage (Vmp)	35.0V	35.4V	35.8V	36.2V	36.5V
Maximum Circuit Current (Imp)	6.60A	6.64A	6.67A	6.70A	6.74A
NOCT	45 °C ± 2 °C				
NOCT: Irradiance 800W/m ² , ambient temperature 20 °C, wind speed 1 m/s					

Mechanical Characteristics

Solar Cells	Polycrystalline 156.75 × 156.75mm
No. of Cells	72 (6 × 12)
Dimensions	1956mm×992mm×40mm(77.0in×39.1in×1.6in)
Weight	22.5kg (49.6lbs)
Front Glass	High transmission tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP67
Cable	4mm ² (IEC), 1000mm
Connectors	MC4/MC4 Compatible
Packaging Configuration	26pcs/box, 672pcs/40'HQ Container



Temperature Characteristics

Temperature Coefficient of Pmax	γ (Pm)	-0.41%/K
Temperature Coefficient of Voc	β (Voc)	-0.32%/K
Temperature Coefficient of Isc	α (Isc)	0.050%/K


Warranty

10-year product warranty	
25-year warranty on power output	
Specific information is referred to the product quality guarantee	

Information Box

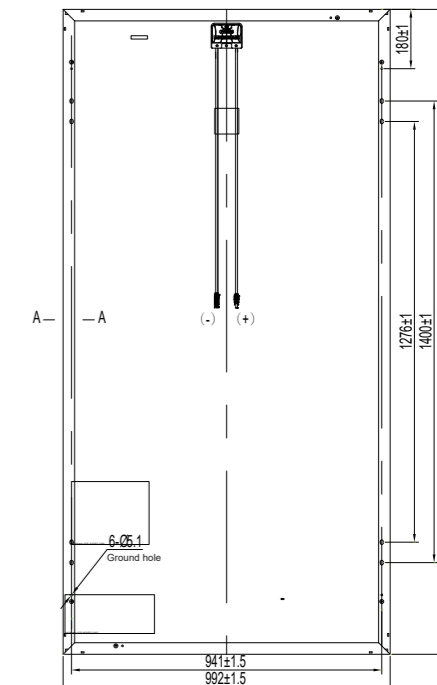

Current-Voltage & Power-Voltage Curve

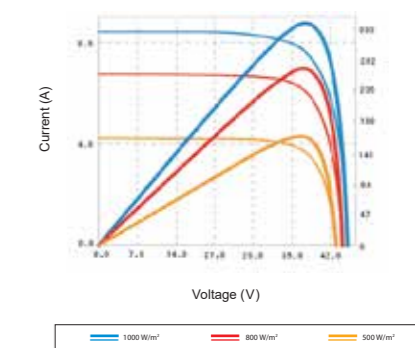

I-V Curves

Shanghai Aerospace Automobile
Electromechanical Co., Ltd.
HT Solar Energy J.S.C.

Factory: Lianyungang ShenZhou
New Energy Co., Ltd.
HT Solar Energy J.S.C.